




TouellSkouarn

Amplaeur red Elektrek Tube Headphone Amp

Very simple but effective stereo headphone tube amplifier, with balanced output. Input right is normal to left input so it can be used to monitor mono or stereo channels. Balanced output with very low impedance. Compatible with 6j1P, 5654, 6AK5, EF95 tubes. Built with High Performance Audio Operational Amplifiers OPA2134 and NOS OTK Russian Tubes.

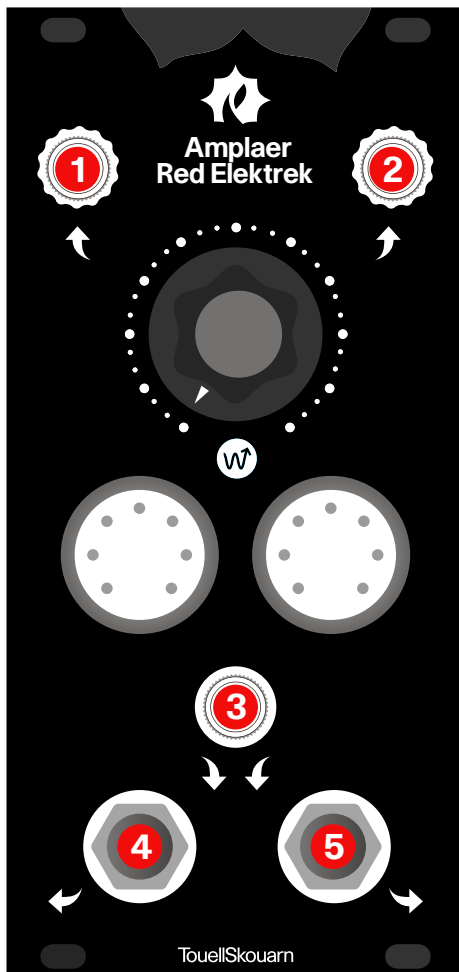


- 12HP / black pcb panel
- Jacks : Inputs X2 , Balanced Output x2, stereo headphone output
- Tube sound
- Compatible with 6j1P, 5654, 6AK5, EF95 tubes
- Hand-wired, Boutique quality, Made in Plougastel-Daoulas and Landerneau.
- 12V / 5V selectable heater operation
- Stupid Breton name


1. Mono audio in (Left)
2. Right mono in (Normaled to 1 if nothing plugged in)
3. Stereo Headphone 3,5 jack out
4. Balanced Left out (6,35)
5. Balanced Right out (6,35)

12V / 5V selectable heater operation

5V heater jumper position
draw 350mA from 5V bus



12V heater jumper position
draw 350mA from 12V bus



+12v: 40mA (+ 350mA if 12V heaters)
-12v: 35mA
+5v: 350 mA (0mA if 12V heaters)